

2200


3000




PILOT LADDERS

ISO 799-1(2019)
Res.A. 1045(27)


≥ 3000



BOTTOM VIEW
CONTINUOUS ROPE WITH NO JOINTS

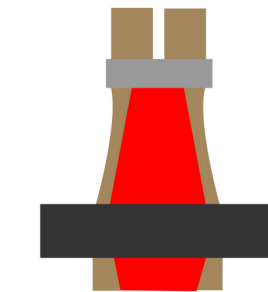

PERMANENT MARKINGS
AS PER UPDATE RULE
A 5.21 OF ISO 799-1 : 2019

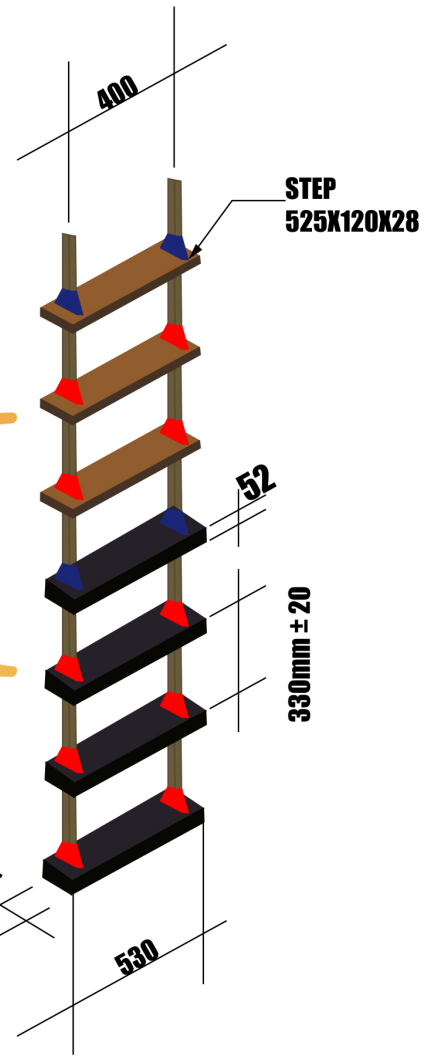

- Steps have non-skif / anti-slip surface.
- The side ropes of the pilot ladder consist of two uncovered ropes not less than 20mm in diameter on each side and should be continuous at the bottom, white no joints and have a breaking strength of at least 24 KN per side rope.
- A permanent marking is provided at regular intervals (e.g. 1 meter. white black splitting distance pieces) throughout the length of the ladder consistent with ladder desing, use and maintenance in order to facilitate the rigging of the ladder to the required height.

Producer : WORLD CLEAN INTERNATIONAL S.A.

Material: HARDWOOD

Title: EMBARKATION LADDER 22 MTR

Aproval: ISO 5489 (2008)

Components: 63 STEPS 4 RUBBER STEPS



Manufacture:
WCI Pilot Ladders Panama Republic of Panama
Distributed for main ports in America

Weight: 213 Kg

Scale:

Date: July 2021

Size:"8.5x11"

Units: mm

Rev.
c.

Page
1/1